




NGK-LOCKE, INC.

1609 Diamond Springs Rd, VA Beach VA 23455, USA
Tel (757) 460-3649, Fax (757) 460-3550

8" and Larger Corona Ring Installation Instruction ***(Instrucciones para la Instalación del Anillo de Corona)***

For 6" ring Installation Instruction please see other side
(Vea el otro lado de la pagina para instruccines de instalacion del anillo de corona de 6".)

1. End fitting collar must go inside ring groove.
(El cuello del herraje del aislador debe fijarse dentro de la ranura del anillo.)

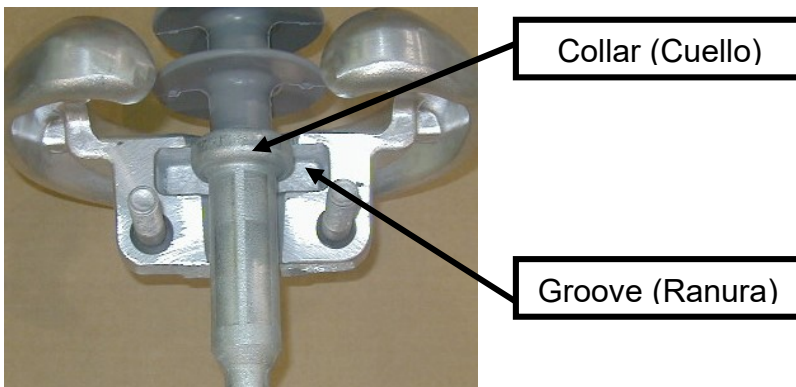

2. Tighten clamp evenly to ring, max. torque, 15 ft-lb.
or 20 N-M
(Apriete uniformemente la grapa al anillo con maximo momento de torsion de 15 ft-lb o 20N-M.)





NGK-LOCKE, INC.

1609 Diamond Springs Rd, VA Beach VA 23455, USA
Tel (757) 460-3649, Fax (757) 460-3550

6" Corona Ring Installation Instruction ***(Instrucciones para la instalacion del anillo de corona 6")***

For 8" and larger ring Installation Instruction please see other side
(Para instrucciones de instalacion del anillo de corona de 8" o mas grandes, vea el otro lado de la pagina)

1) Installation Position

The bulge of end fitting must couple with the inside groove of ring. The round surface faces the shed side of insulator.


(La protuberancia en el fin del accessories debt asociar con la remora de adaptor del anillo. La superficies Redondo encore el falcon en el lado del aslant)



2) Assembly of Ring

2nd ring is applied to the opposite side of the 1st ring and the bolts are passed through both ring holes. The lock washer is put between the ring and the nut.

(El Segundo anillo es applicator en lado pesto del primer anillo y los Cerritos son parades poor ambos hoys del anillo. La cerradura de arandela es puesta entre medio del anillo y la tuerca.)

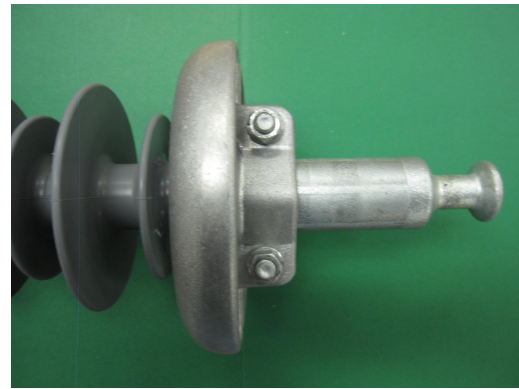

3) Tightening

The nuts are tightened equally. A socket wrench is appropriate for this process because the spaces around the nuts are narrow. Tighten rings evenly, max. torque is 10 ft-lb. (13.5 N-M).

(Las tuercas son apretadas igualmente. La llave inglesa del enchases as appropriate para ester processor parquet los spacious alerted de lasso's tierces son angst's. Arête analogs uniformemente ,maxim memento de torsion es 10 FT-LB o 13.5 N-M.)

